

Javelin J360i

Print reliably and consistently with this sturdy, high-performance single-sided colour card printer

The perfect solution for simple, straightforward card printing and personalization, the NBS Javelin J360i colour card printer offers a dynamic feature set with options such as built-in Ethernet and contact and contactless smart card encoding. With its unique, streamlined design and metal enclosure, the Javelin J360i is extremely robust and sturdy.

Powerful

Setting new standards, this single-sided, full colour card printer is loaded with user-friendly features and a full range of options, making the Javelin J360i the most powerful and flexible printer in its class.

Reliable

With its new, innovative, highly reliable angled feeder design (patent pending), there is simply no better choice than the Javelin J360i for mission critical applications.

Flexible

Designed to integrate seamlessly in a wide variety of applications, the Javelin J360i comes standard with an LCD and offers a full range of options, including magnetic stripe encoding and smart card personalization.

FEATURES

- *Sturdy metal case*
- *Full colour print speed of 25 seconds per card*
- *USB with optional built-in Ethernet*
- *100 card capacity feeder plus extension kit*
- *LCD for immediate printer status*
- *TrueColours™ colour ribbon supplied with each printer*



Javelin® J360i *Technical Details*

GENERAL SPECIFICATIONS

- Colour dye sublimation or monochrome thermal transfer printing
- 25 seconds per card - full colour, single sided (YMCKO)
- 4 seconds per card - monochrome
- 300 dpi (11.8 dots/mm) print resolution
- Card feeder capacity 100 cards (30 mil)
- Card feeder extension kit increases capacity to 200 cards (30 mil)
- Card output hopper capacity - 100 cards (30 mil)
- USB port
- Port for Kensington® security lock
- 16Mb image memory standard
- Windows® drivers for XP, Vista, 2000 & Server 2003
- Up to 3 year printer warranty
- Up to 2 year (unlimited passes) printhead warranty

OPTIONS

- Smart card contact station (30 mil cards only)
- Smart card personalization kit (including internal coupler)
- Contactless encoding (Mifare and HID)
- Built-in Ethernet
- Dual Coercivity, 3-track magnetic encoder (30 mil cards only)
- Hot Swap warranty program (USA & UK only)
- Cleaning supplies
- Service Manual

RIBBONS

Javelin i-Series printers require the use of Javelin branded i-Series TrueColours ribbons for full colour printing.

- Monochrome: Black 1000 & 1500 cards/roll
- Monochrome: 1000 cards/roll: blue, red, green, silver, gold, white and scratch-off grey (840 cards/roll)
- YMCKO - 200 & 330 cards/roll
- Half-panel YMC plus full-panel KO - 450 cards/roll
- KdO - 500 cards/roll
- KrO - 500 cards/roll
- Overlay varnishes - clear and hologram: 350 cards/roll

BAR CODES & FONTS

- Code 39, Code 128 B and C with and without check digit
- 2 of 5 and 2 of 5 interleaved
- UPC-A, EAN 8 and EAN 13
- PDF-417 2D bar code, other symbologies and True Type fonts via Windows® drivers

CARD SPECIFICATIONS

- Types - PVC, PVC composite
- Card width/length: ISO CR-80 - ISO 7810, 2.125" (54mm) x 3.385" (86mm)
- Magnetic stripe - ISO 7811
- Smart card - ISO 7816-2
- Card thickness - 10 mil (.25mm) to 60 mil (1.524mm) +/- 10%

PHYSICAL DIMENSIONS


- Width: 18.2" (462mm) excluding hopper
- Depth: 8.2" (208mm)
- Height: 9.7" (246mm)
- Weight: 28 lbs (12.9 kg)

ENVIRONMENTAL

- Operating temperature: 60°F to 86°F (15°C to 30°C)
- Operating humidity: 20% to 65% non-condensing
- Storage temperature: 23°F to 158°F (-5°C to 70°C)
- Ventilation: free air

ELECTRICAL

- 110 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- FCC Class B, CE, UL and CUL approved

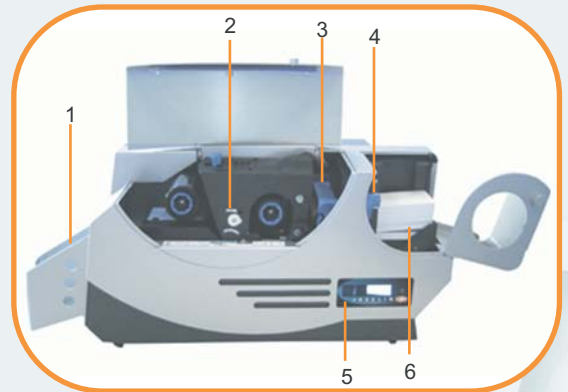

1. Large output hopper
2. User replaceable printhead
3. Easy-to-change cleaning roller
4. Simple card thickness adjuster
5. LCD display panel
6. Easy single card feed



Wide open print head bracket makes for easy ribbon loading



LCD shows current status of printer



For batch printing, use the card feeder extension kit

Microsoft, Windows, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.



Corporate Headquarters
Canada
703 Evans Avenue
Toronto, Ontario
M9C 5E9
Canada
tel: +1 416.621.1911
fax: +1 416.621.8875

Contact your nearest
NBS location for
more information on
Javelin card printers:

United Kingdom
For Sales & Technical Support
7 Byfleet Technical Centre
Canada Road
West Byfleet, Surrey
KT14 7NB
United Kingdom
tel: +44 (0) 1932.351531
fax: +44 (0) 1932.351382

USA
For Sales
70 Eisenhower Drive
Paramus, NJ 07652
USA
tel: +1 416.840.8620
fax: +1 201.846.6160

USA
For Technical Support
10925 Bren Road E
Minneapolis, MN 55343
USA
tel: +1 952.912.9400
fax: +1 952.912.9439

Australia
For Sales
PO Box 780
Hurstville BC
NSW 1481
Australia
tel: +61 (2) 9546.6841
fax: +61 (2) 9546.6851

Website: www.nbstech.com
Email: info@nbstech.com

©March-08 NBS Technologies Inc. Specifications are subject to change without notice. All rights reserved. All brand and product names are the trademarks or registered trademarks of their respective holders.